An eco-designed motor range for manufacturers

DEXXO® COMPACT io



SOMFY

100 % Connected
Compatible with TaHoma Pro, Serve-e-Go, Tahoma.

Customisable motor and remote control with the manufacturer's logo.

APPLICATION AREA:

Dexxo Compact 600 io: up to 7 m^2
Dexxo Compact 750 io: up to 10 m^2

Concentrated efficiency for garage doors motorization

MAIN FUNCTIONALITIES

- Integrated obstacle detection
- Soft start and stop
- Back up battery
- Led courtesy light
- Lighting receiver remote control

BENEFITS FOR PROFESSIONALS

Easy install
- Start and run in less than 90 s
- Dedicated «Prog» button for transmitter programming
- Dedicated «Set» button for settings

Easy prog & Easy diagnostic
- TaHoma Pro: setting tool
- Serve-e-Go: remote maintenance and diagnostic tool

Total control on motorization parameters for accurate, smooth and safe operation
- Encoder technology
- Adjustable speed, slow down area and obstacle detection sensitivity

Extended lighting capability
- Built-in led courtesy light synchronized with garage door operation and controlled separately with remote controls, TaHoma
- Lighting receiver remote control

Comfort and security accessories full compatibility
- 2 wired control inputs: total opening
  > Video door phone compatibility
- Photoelectric cells
- Orange light
- Wicket door contact

BENEFITS FOR END USERS

A unique differentiating experience in home access control, for more comfort, fluidity and security

TaHoma: advanced connected home
- Open and close the garage with your smartphone or voice command.
- Remotely control your garage door in case of emergency or to allow access for deliveries
- Remotely check the status of your garage door

Serenity and comfort of use
- Led courtesy light
- Back up battery when power fails

Long life operation
- Smooth operation with soft start and stop

TECHNICAL CHARACTERISTICS


Power supply	220-230 V / 50-60 Hz	
Maximum stand by consumption	< 0,5 W	
Traction force	600 N / 750 N	
Speed	14 cm/s max	
Climatic operating conditions	-20° C / +60 ° C - IP 20	
Radio frequency	io homecontrol® 868 Mhz	
Number of programmable channels	1 way 2 way	38 unlimited
24 V output power supply	24 V — DC / 400 mA max	

Adjustable parameters


4 adjustable parameters:

- **P1:** closing slowing zone (none, short, long)
- **P2:** obstacle detection sensitivity (very low, low, standard, maximum)
- **P3:** photoelectric cells (inactive, active with auto-test)
- **P4:** Low consumption mode (active, inactive)

GENERAL OVERALL SIZE

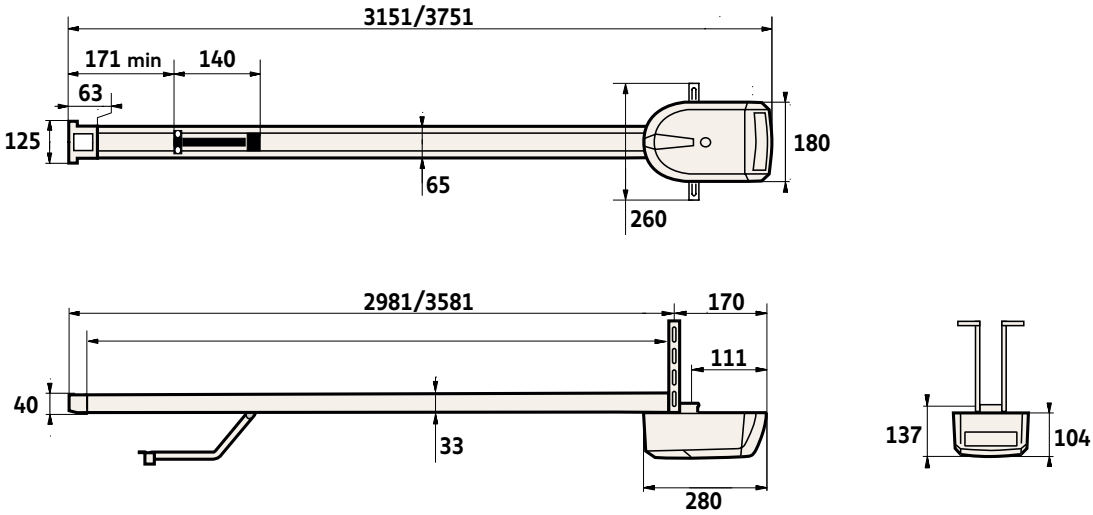

GENERAL WIRING DIAGRAM

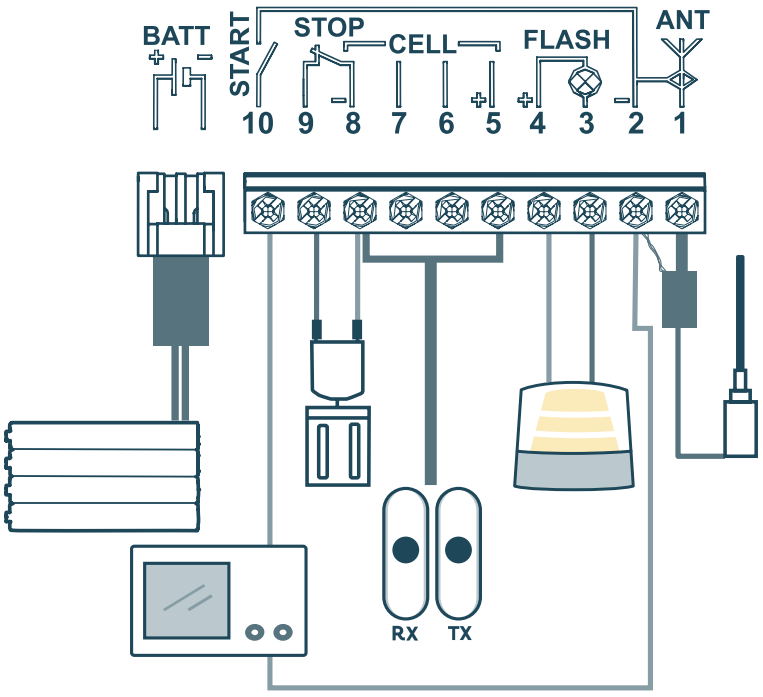

5 YEAR WARRANTY

CE

Designed & Made in France

Somfy • Photos: Semaphore • SOMFY ACTIVITES SA, share capital 35.000.000 euros, RCS Annecy 303.970.230 • ©SOMFY.COM • Mars 2023